

Verbatim LED Downlight 12W 685lm 25° - Chrome

- Energy saving alternative for MR16 or PAR16 Halogen downlights
- 25° beam angle
- Adjustable LED head: +/- 30°
- 30,000 hours lifetime
- Direct mains voltage connection (220-240V)
- Glare free light output of 685lm

Product Number	52406
General Data	
Housing material	Aluminium
Housing colour	Chrome
Protection class	IP20
Geometric Data	
Length (mm)	55
Outer diameter (mm)	112
Inner diameter (mm)	75
Weight (g)	360
Electric Data	
Wattage (W)	12
Voltage (V)	220-240
Current (mA)	58
Power Factor	0.90
Operating Frequency (Hz)	50-60
Safety Class	Class II
Power supply	external
Photometric Data	
Luminous Flux (lm)	720
Luminous Flux 90° Cone (lm)	685
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	60
Luminous Intensity (cd)	3150
Beam Angle (°)	25
Lifespan	
Lifetime (hrs)	30,000
Switching Cycle	60,000
Dimmable	yes




30/07/2014

Lifestyle image




Technical Drawings

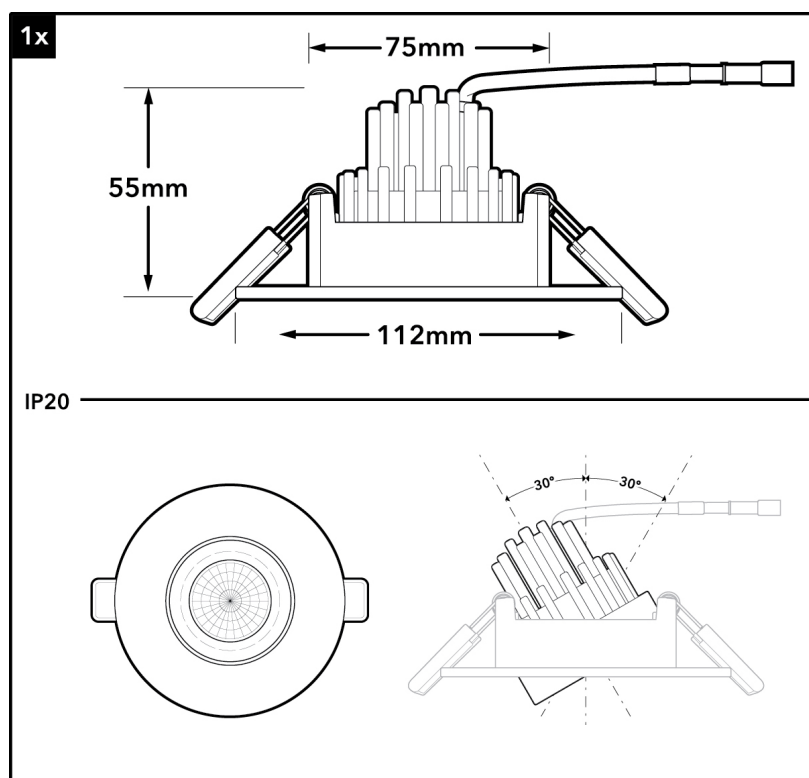


30/07/2014

Photometric Diagrams

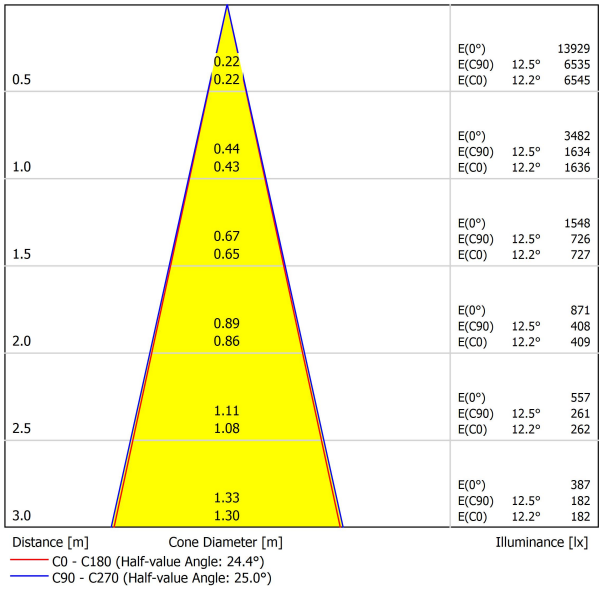

30/07/2014

Energy Rating

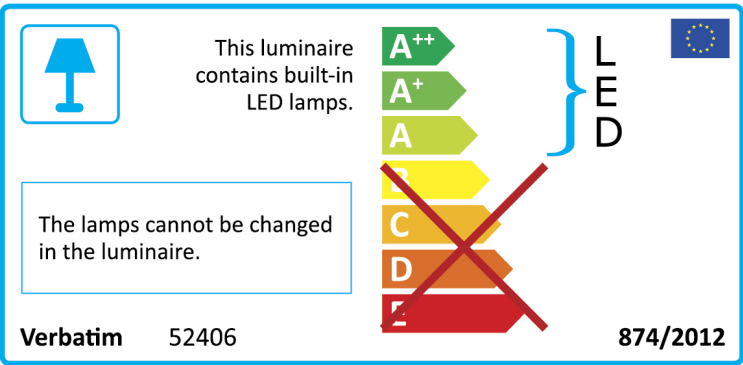

Technical Packaging Details

Barcode	023942524069
EAN 128	(02)00023942524069(37)04(91)162
EAN 14	50023942524064
Pack Dimensions(HxWxL)	73 x 120 x 168 (mm)
Pack Weight	450 (g)
MOQ	4
Carton Dimensions (HxWxL)	96 x 266 x 359 (mm)
Cartons/Pallet	80
Layers/Pallet	10
Units/Pallet	320

30/07/2014